



GET READY

ADVAN NEOVA AD09



SPEED RANGE

W/V

21 inch	20 inch	19 inch	18 inch	17 inch	16 inch	15 inch
------------	------------	------------	------------	------------	------------	------------



Pattern No. AD09


The new tread pattern exclusively for AD09



IN-SIDE for WET Performance

- **Increase the groove area**
Wide wavy grooves enable enhanced drainage performance. Displays exceptional hydroplaning resistance at high speeds.

- **Tuning in/out groove angle to enhance block rigidity**



- **Smoothing block edge**
Improving wear performance and keeping wet performance.




OUT-SIDE for DRY Performance

- **Increase the contact area**
Improved pattern rigidity through wide shoulders and greater road contact area ensure enhanced performance in the dry.


Technical part

More round profile and Two-Layered belt cover achieve both high rigidity and high cornering force.

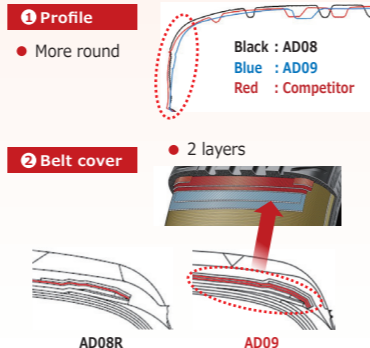

Contact Shape with road surface

Improve dry performance and steering stability at high speed.

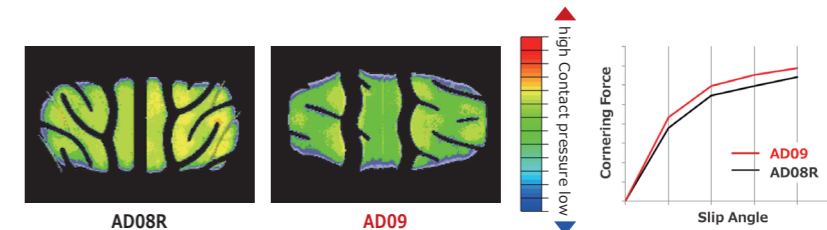

Premium design with YOKOHAMA crafting

IA special tooling process in the molds combined with the YOKOHAMA group's unique expertise has led to the development of stylish dark design.



ADVAN NEOVA AD09

Pattern No. AD09

Inch	Series	Dimensions	RF/XL	Overall Diameter (mm)	Approved Rim Width (inch)
21	30	305/30R21 104W	XL	717	10.5-11.5
		325/30R21 108W	XL	729	11-12
20	30	245/30R20 90W	XL	656	8-9
		265/30R20 94W	XL	668	9-10
		275/30R20 97W	XL	674	9-10
		285/30R20 99W	XL	680	9.5-10.5
		295/30R20 101W	XL	686	10-11
		305/30R20 103W	XL	692	10.5-11.5
		335/30R20 108W	XL	710	11.5-12.5
		235/35R20 92W	XL	672	8-9.5
35	30	245/35R20 95W	XL	680	8-9.5
		255/35R20 97W	XL	686	8.5-10
		265/35R20 99W	XL	694	9-10.5
		275/35R20 102W	XL	700	9-11
		285/35R20 104W	XL	708	9.5-11
		295/35R20 105W	XL	714	10-11.5
		245/40R20 99W	XL	704	8-9.5
		255/40R20 101W	XL	712	8.5-10
19	30	255/30R19 91W	XL	637	8.5-9.5
		265/30R19 93W	XL	643	9-10
		275/30R19 96W	XL	649	9-10
		295/30R19 100W	XL	661	10-11
		305/30R19 102W	XL	667	10.5-11.5
		325/30R19 105W	XL	679	11-12
		225/35R19 88W	XL	641	7.5-9
		235/35R19 91W	XL	647	8-9.5
35	30	245/35R19 93W	XL	655	8-9.5
		255/35R19 96W	XL	661	8.5-10
		265/35R19 98W	XL	669	9-10.5
		275/35R19 100W	XL	675	9-11
		285/35R19 103W	XL	683	9.5-11
		225/40R19 93W	XL	663	7.5-9
		235/40R19 96W	XL	671	8-9.5
		245/40R19 98W	XL	679	8-9.5
40	30	255/40R19 100W	XL	687	8.5-10
		265/40R19 102W	XL	695	9-10.5
		275/40R19 105W	XL	703	9-11
		285/30R18 97W	XL	629	9.5-10.5
		295/30R18 98W	XL	635	10-11
		225/35R18 95W	XL	659	7-8.5

Inch	Series	Dimensions	RF/XL	Overall Diameter (mm)	Approved Rim Width (inch)
18	35	245/35R18 92W	XL	629	8-9.5
		255/35R18 94W	XL	635	8.5-10
		265/35R18 97W	XL	643	9-10.5
40	30	295/35R18 103W	XL	663	10-11.5
		215/40R18 89W	XL	628	7-8.5
		225/40R18 92W	XL	637	7.5-9
		235/40R18 95W	XL	645	8-9.5
		245/40R18 97W	XL	653	8-9.5
45	30	255/40R18 99W	XL	661	8.5-10
		265/40R18 101W	XL	669	9-10.5
		275/40R18 103W	XL	677	9-11
		215/45R18 93W	XL	651	7-8
		245/45R18 100W	XL	677	7.5-9
50	30	245/50R18 104W	XL	703	7-8.5
		215/40R17 87W	XL	604	7-8.5
		235/40R17 90W		620	8-9.5
17	40	245/40R17 91W		628	8-9.5
		255/40R17 98W	XL	636	8.5-10
		195/45R17 81W		608	6-7.5
		205/45R17 88W	XL	616	6.5-7.5
		215/45R17 91W	XL	626	7-8
45	30	225/45R17 94W	XL	634	7-8.5
		235/45R17 94W		644	7.5-9
		245/45R17 95W		652	7.5-9
		255/45R17 102W	XL	662	8-9.5
		205/50R17 89W		638	5.5-7.5
50	30	225/50R17 98W	XL	658	6-8
		195/45R16 80W	XL	582	6-7.5
		205/45R16 87W	XL	590	6.5-7.5
16	45	215/45R16 86W		600	7-8
		225/45R16 89W		608	7-8.5
		195/50R16 84V		602	5.5-7
		205/50R16 87V		612	5.5-7.5
		225/50R16 92V		632	6-8
55	30	205/55R16 91V		632	5.5-7.5
		195/50R15 82V		577	5.5-7
		205/50R15 86V		587	5.5-7.5
15	50	165/55R15 75V		563	4.5-6
		185/55R15 82V		585	5-6.5
		195/55R15 85V		595	5.5-7

XL = Extra Load